

COMMERCIAL TYPE – **ELECTRICALLY HEATED** AIR CURTAINS
100 mm cross flow fan



R,LEH – 13s



For use in :

- **Small Shops**
- **Bars**
- **Cafeterias**
- **Small Hotels**
- **Banks**
- **Schools**
- **Super markets**



COMMERCIAL TYPE – ELECTRICALLY HEATED AIR CURTAINS
100 mm cross flow fan




Air Curtain R,LEH – 13s is capable of covering openings of 1.00 m long

Technical Details


Max Door Height (m)	2.3
Max Door Width (m)	1.00
Outlet Velocity (m/sec)	5.5/8.0
Air Volume (m ³ /h)	1100/1600
Motor Power (W)	120
Capacitor (µF)	4
Motor Speed (rpm)	1000/1310
Power Supply	400V, 3N, 50Hz
Noise level in 1 m (dB)	52/58
Max CURRENT CONS	9 A/Phase (6KW)
THERMAL POWER (KW)	6 KW
Toutlet-Tinlet (at 3 speeds)	15 ⁰ C/20 ⁰ C

AIR VELOCITY DISTRIBUTION CHART

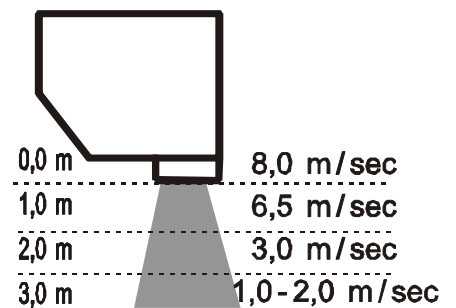

Dimensions


A: Total Length	1045±1 (mm)
B: Total Width	166 (mm)
C: Height	172 (mm)
D: Outlet Length	900(mm)
E: Outlet Width (int.)	62 (mm)
H: Outlet Height	64 (mm)
Weight	11 (Kgr)

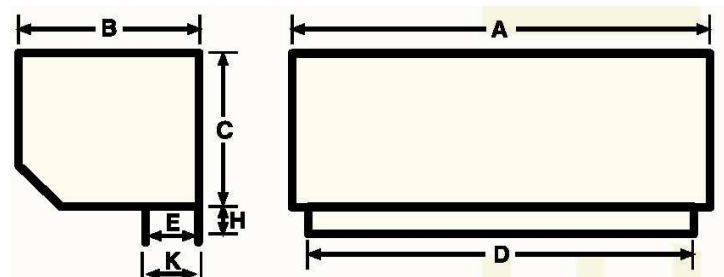

OPERATIONAL CHOICES

A) Standard Control Operation

- HI – LOW switch for motor speed selection
- Rotary switch for :
- ON-OFF motor operation
- 33% - 66% - 100% Heating Power Selection

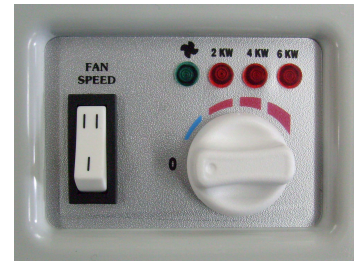

B) Wired Remote Control Operation

Wall Mounted Wired Remote Control (up to 3 m cable) which additionally can be supplied with an Infrared Remote Control as well .



C) Infrared Remote Control Operation

Case B can additionally be provided with an infrared Remote Control.

